由 Autodesk 教育版产品制作

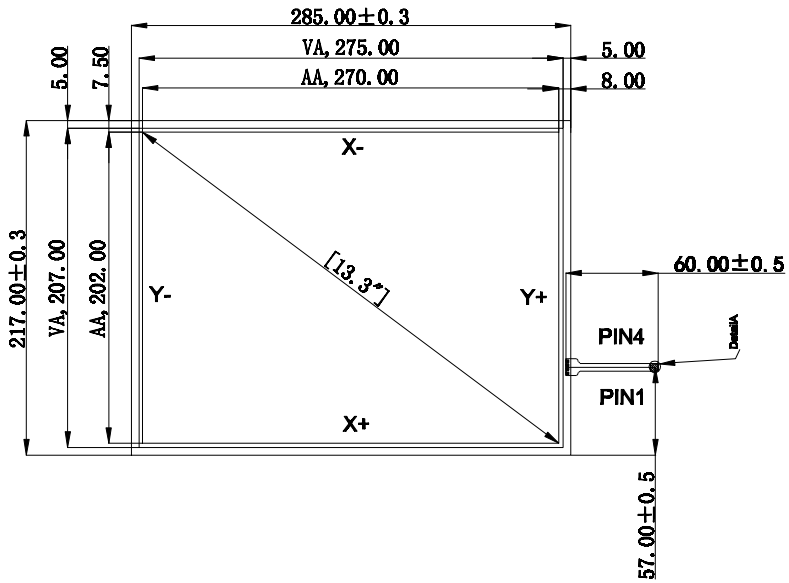

Logic:



DetailA：

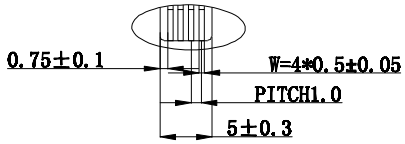

Notes:

1.Type:Film to Glass
2.Operating Voltage:≤10v
3.Operation Temperature:-20℃～65℃
Storage Temperature:-30℃～70℃
4.Life Time:1.000.000 times
5.Connect Material:FPC
6.Response Time:≤10ms
7.Linearity:≤1.5%
8.Transmittance:≥75%
9.Surface Hardness≥3H(pencil)
10.Operation force:60g～150g
11.Resistance:X:361Ω-882Ω Y:202Ω-494Ω

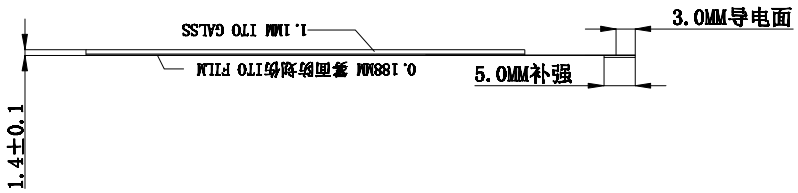

TOLERANCES (UNLESS OTHERWISE STATED)	
DECIMALS	ANGLES ±0.5%
>2000MM	±2.00MM
1600< X ≤2000M	±1.20MM
1200< X ≤1600MM	±0.80MM
800< X ≤1200MM	±0.50MM
400< X ≤800MM	±0.40MM
120< X ≤400MM	±0.30MM
30< X ≤120MM	±0.20MM
<30MM	±0.10MM

GreenTouch Technology Co.,Ltd

Model No.:	GT-4W-133B-1	Size	13.3"	Ratio	4:3
Structure	G+F	Unit	mm	Scale	1:1
Design	李俊	Date	2015.9.5	Page	1/1
Check	付作本	Date	2015.9.5	Version	A0
Release	汪辉	Date	2015.9.5		

由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作