


文件编号:


## 前视图 1:1



## 侧视图 横向10:1

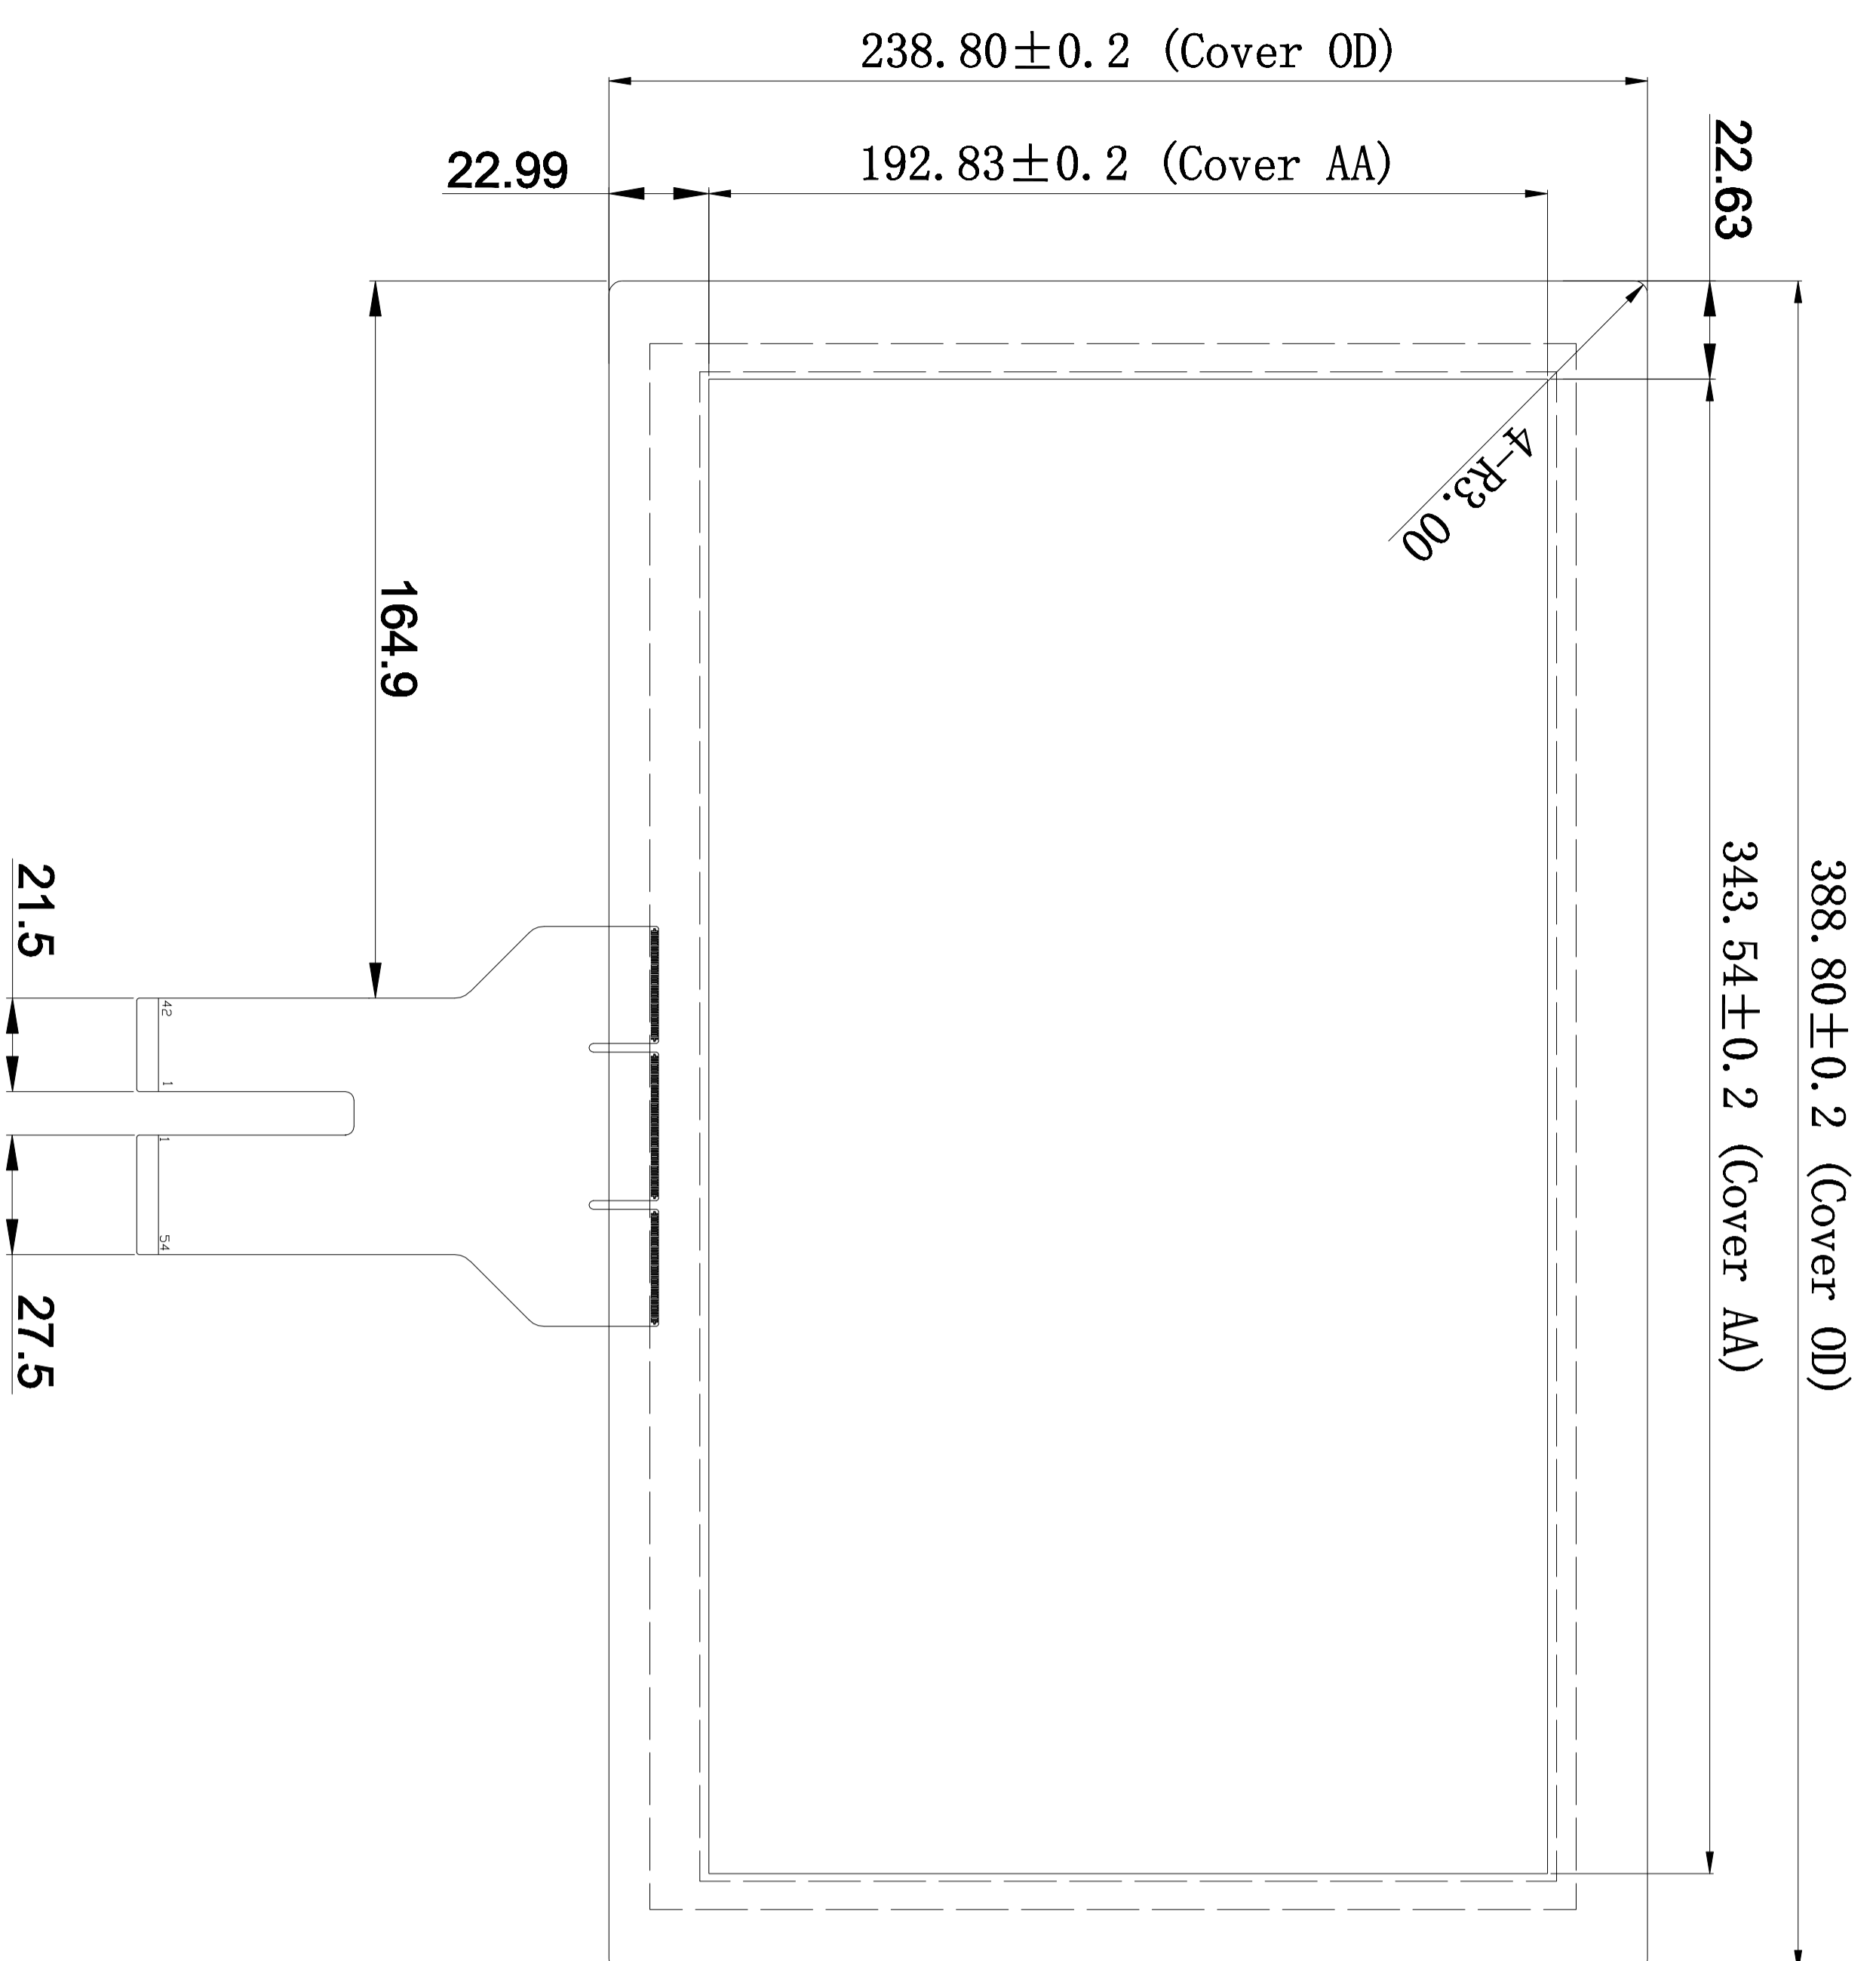

## 后视图 1:1

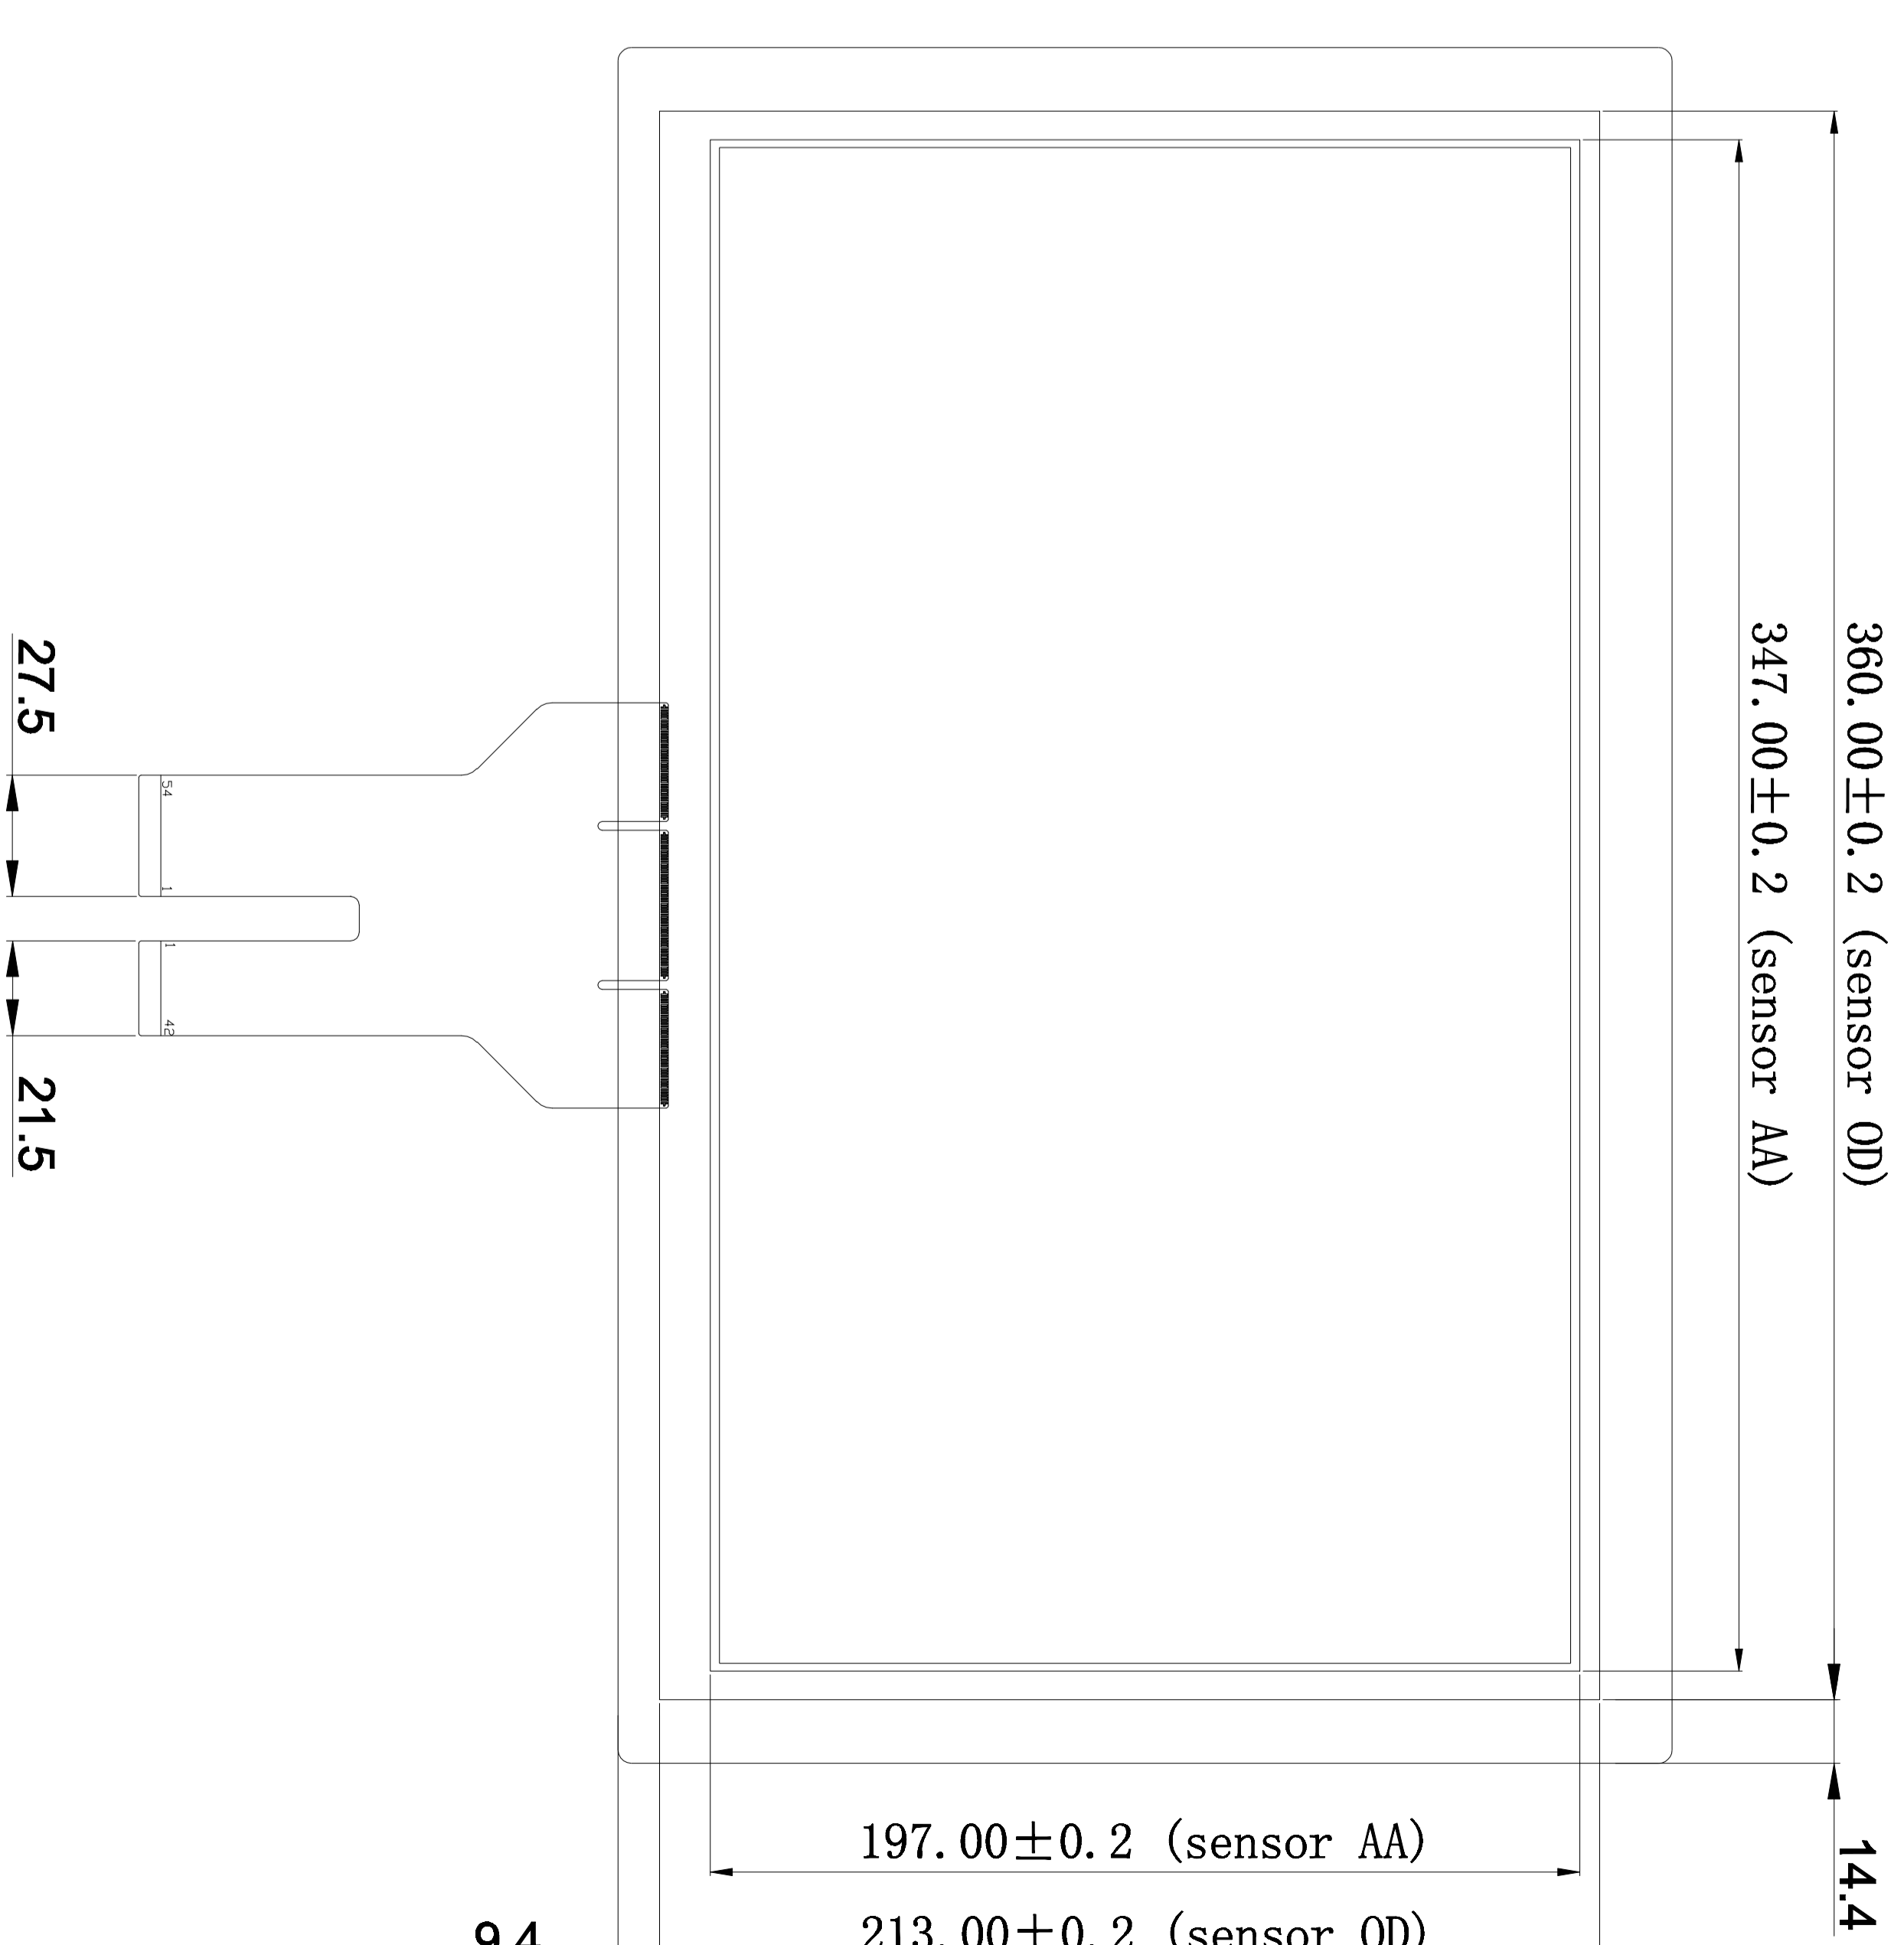

- 技术参数:
- Cover GLASS+ITO GLASS+SCA+PPC  
Cover GLASS:3.0mm  
ITO GLASS: 1.1mm  
SCA: 0.2mm  
总厚度: 4.3±0.15mm (不含背胶)
  - 工作电压: 5V/3.3 V
  - 透光率: ≥85%
  - 表面硬度: 6H
  - 工作环境: -20°C~+70°C, ≤90%RH
  - 储存环境: -30°C~+80°C, ≤90%RH
  - 未注尺寸公差按±0.2mm
  - 通讯接口: USB
  - IC (EXXC8083)
- SENSOR 工艺: 黄光ITO; 激光银浆

## 客户确认签字:

USB	PIN Definition
1 VCC	1 VCC
2 D-	2 D-
3 D+	3 D+
4 GND	4 GND

格林触控  
GreenTouch

GreenTouch Technology Co., Ltd

DRAWN BY:	李俊	PRODUCT MODEL:	GT-CTP-Y156E-2
CHECKED BY:	邓福生	CUSTOMER ID:	
APPROVED BY:	付作书	DATE:	2019-11-14
批 准:	付作书	日 期:	
Standard tolerance:	公差:	网 址:	

VIEW:		投影方式:	第三角投影法
UNITS	mm	单 位:	
SCALE	1:1	比 例:	