
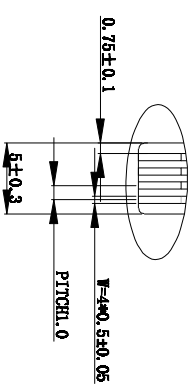


版本	变更原因	日期	姓名


Notes:

- 1.Type:Film to Glass
- 2.Operating Voltage: $\leq 10V$
- 3.Operation Temperature: $-10^{\circ}C \sim 60^{\circ}C$
Storage Temperature: $-20^{\circ}C \sim 70^{\circ}C$
- 4.Life Time:1,000,000 times
- 5.Connect Material:FPC
- 6.Response Time: $\leq 10ms$
- 7.Linearity: $\leq 1.5\%$
- 8.Transmittance: $\geq 75\%$
- 9.Surface Hardness: $\geq 3H$ (pencil)
- 10.Operation force: $60g \sim 150g$
- 11.Resistance:X: 479Ω - 1170Ω Y: 152Ω - 372Ω

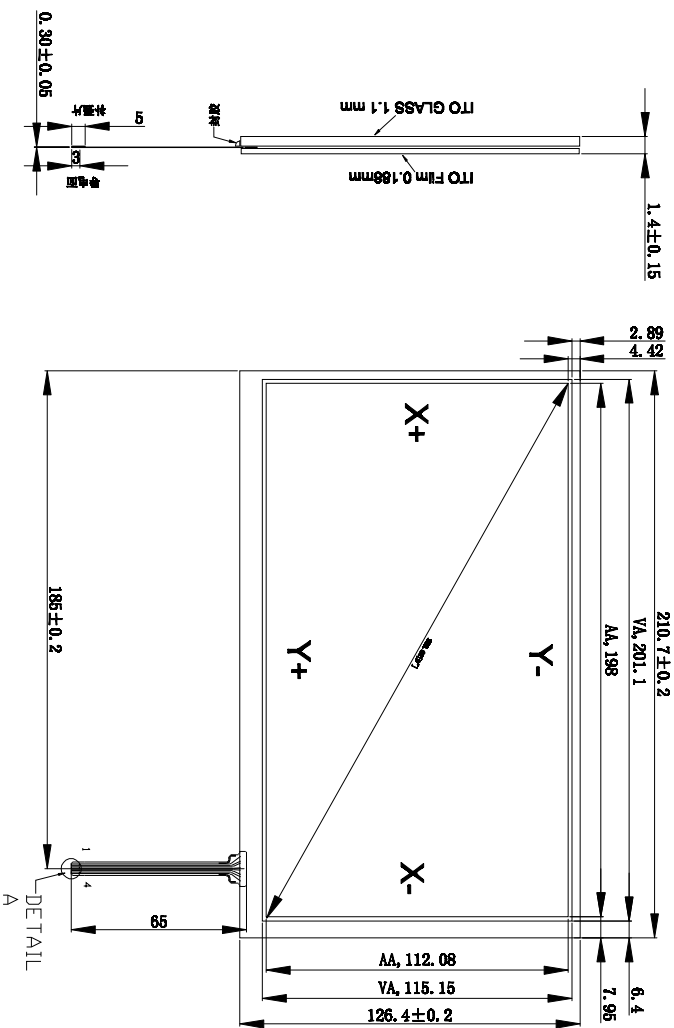

DetailA

PIN #	Assignment
1	X+
2	Y+
3	X-
4	Y-



TOLERANCES (UNLESS OTHERWISE STATED)
DECIMALS ANGLES

>200MM	$\pm 1.20MM$	$\pm 0.5^{\circ}$
1600< X < 2500MM	$\pm 1.20MM$	$\pm 0.5^{\circ}$
1200< X < 1600MM	$\pm 0.80MM$	$\pm 0.5^{\circ}$
800< X < 1200MM	$\pm 0.50MM$	$\pm 0.5^{\circ}$
400< X < 800MM	$\pm 0.40MM$	$\pm 0.5^{\circ}$
120< X < 400MM	$\pm 0.30MM$	$\pm 0.5^{\circ}$
30< X < 120MM	$\pm 0.20MM$	$\pm 0.5^{\circ}$
<30MM	$\pm 0.10MM$	$\pm 0.5^{\circ}$

		Shenzhen GreenTouch Technology Co., Ltd	
Model No.:	GT-1W-9B-1	Size	9" 16:9
Structure	GF+	Unit	mm
Design	李俊	Date	2015.10.5
Check	付作书	Date	2015.10.5
Release	赵强	Date	2015.10.5
Version		Page	1/1
		Version	A0